

HM8102-VFR

60 minutes fire-rated mailboxes



Multiple mailboxes | FR60 Fire rated

HM8102-VFR

Our vertical and horizontal fire-rated letterboxes are front delivery / front retrieval (In Front / Out Front) products and achieved full Fire Rating (one hour integrity) to BS 476-20:1987 and are as well Secured by Design Homes 2016 guide compliant. Their size and weight are perfect for any of the following applications: freestanding, wall mounted and recessed applications. If fitted, recessed into a fire-rated wall, our FR60 Fire-rated mailboxes will maintain the integrity of the fire-rated wall and restrict the spread of fire.

FEATURES

Applications









Performances











Body

- Dimensions(mm): 275W x 370H x 140D
- · Electro-galvanised steel
- Polyester powder coated standard RAL colour

Front

- Standard door
- Electro-galvanised steel
- Polyester powder coated standard RAL colour
- Front aperture (235 x 25)
- Sprung painted steel flap

 Cam lock with standard cylinder supplied with 2 keys

Standards

- Compliant to BS476 Part 22 and conforming to BS476 Part 6 & 7
- Secured by Design Homes 2016 guide compliant
- Royal Mail compliant
- British Standard BS EN 13724 compliant

Options

- Surround
- Stands
- Master key
- Anti-arson
- Permanent engraving with ink infill
- Other finishes:
 - Non standard RAL colours
 - Satin stainless steel
 - Print



STANDARD RAL COLOURS



OPTIONAL FINISHES








Non standard **RAL colours**

Satin stainless steel

PRINT Custom artwork

DIMENSIONS

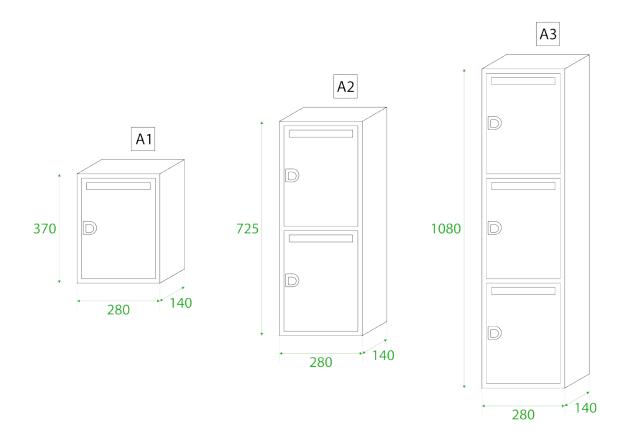

Discover our new exclusive solution for parcel deliveries

MySmartBox® Electronic parcel boxes



Slip 7 Annexe The Historic Dockyard, Chatham ME4 4TZ

Tel. 01634 829 249

www.johnplanck.co.uk